


# KBJ10A Thru KBJ10M

**High Current Glass Passivated Molding Single-Phase Bridge Rectifier**

**Reverse Voltage 100 to 1000V Forward Current 10 A**

## FEATURES

- Plastic Package has Underwriters Laboratory Flammability Classification 94V-0
- High current capacity with small package
- Glass passivated chip junctions
- Superior thermal conductivity
- High IFSM

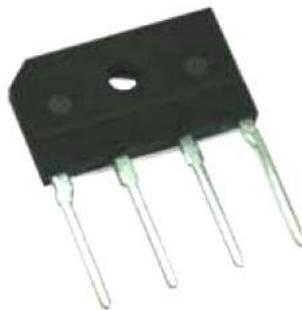

## 1. Maximum & Thermal Characteristics Ratings at 25°C ambient temperature unless otherwise specified.

Parameter Symbol	Symbol	KBJ10A	KBJ10D	KBJ10G	KBJ10J	KBJ10K	KBJ10M	Unit
Maximum repetitive voltage	VRRM	100	200	400	600	800	1000	V
Maximum RMS Voltage	VRMS	70	140	280	420	560	700	V
Maximum DC Blocking Voltage	VDC	100	200	400	600	800	1000	V
Maximum DC reverse current TA=25 °C	IR	10						µA
at rated DC blocking voltage TA=125°C		500						
Maximum average forward rectified output current at	Io	10						A
With heatsink Tc=100°C <sup>(1)</sup>		3.5						A
Without heatsink Ta=25°C <sup>(2)</sup>		200						A
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load	IFSM	166						A <sup>2</sup> sec
Rating of fusing (t<8.3ms)	I <sup>2</sup> t	2.5						KV
Dielectric strength terminals to case, AC 1 minute Current 1mA	Vdia	1.05						V
Operating junction temperature	TJ	-55~150						°C
Maximum thermal on P.C.B. without heat-sink resistance per leg on Al plate heat-sink	R <sub>θJA</sub>	22						°C/W
Storage temperature	R <sub>θJC</sub>	2.5						
Mounting torque	Tstg	-55~150						°C
	Tor	Rating Torque : 0.8						N.m

Notes:

(1) Unit case mounted on aluminum plate heatsink

(2) Units mounted on P.C.B. without heatsink

# KBJ10A Thru KBJ10M

## 2. Ratings and Characteristic Curves ( TA = 25°C unless otherwise noted )

Fig. 1 Derating Curve

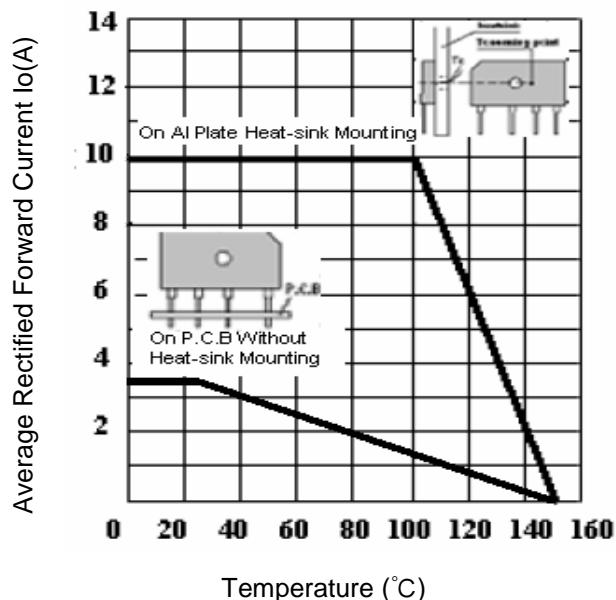


Fig.2 Typical Reverse Characteristics

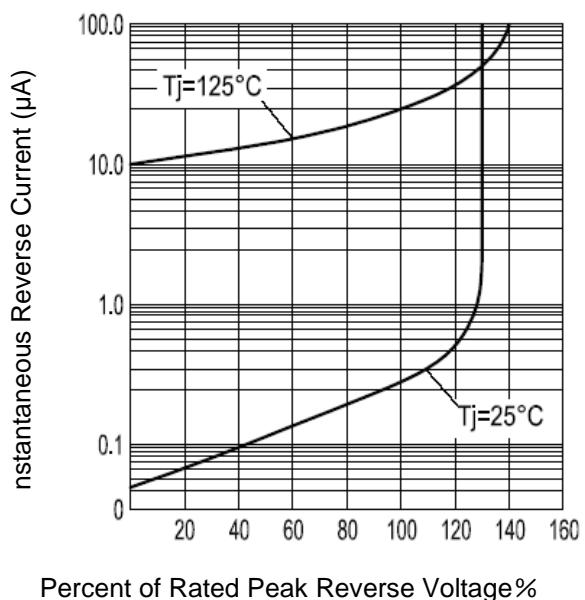


Fig.3 Forward Voltage



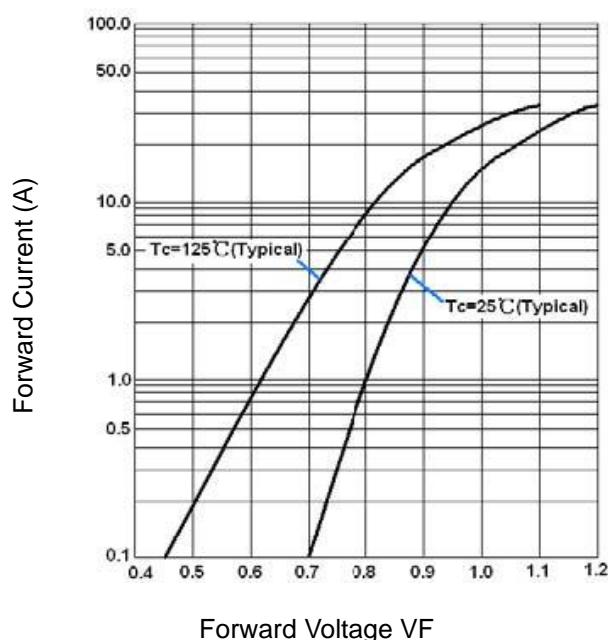


Fig.4 Peak Surge Forward Capability

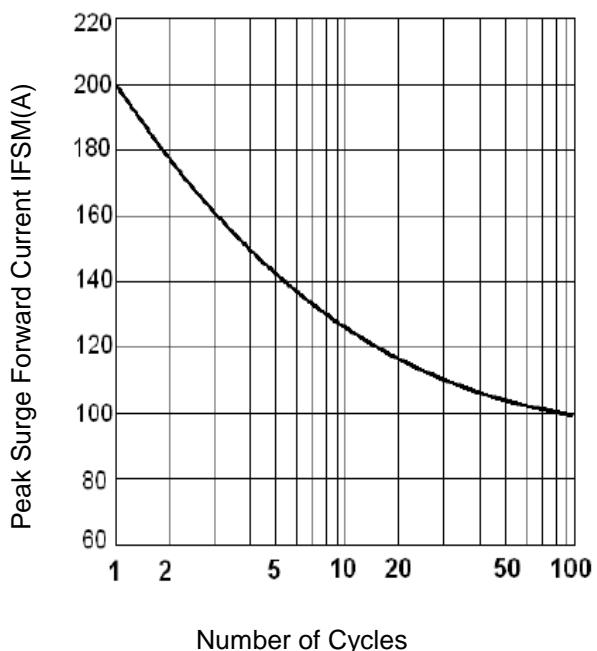

# KBJ10A Thru KBJ10M

## 3. Marking Identification

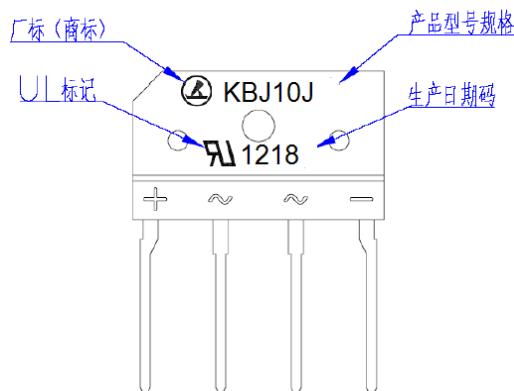

### Note:

生产日期码包含4位数字，例如“1218”，前两个数字“12”表示为2012年，另外二个数字“18”是指第18周，即表示该产品为2012年18周生产。

型号: **KBJ 10 J**

Legend:  
—> bridge reverse voltage=600V  
—> average rectified forward Current=10A  
—> mean: KBJ series bridge

## 4. Dimension

